

Figure 1


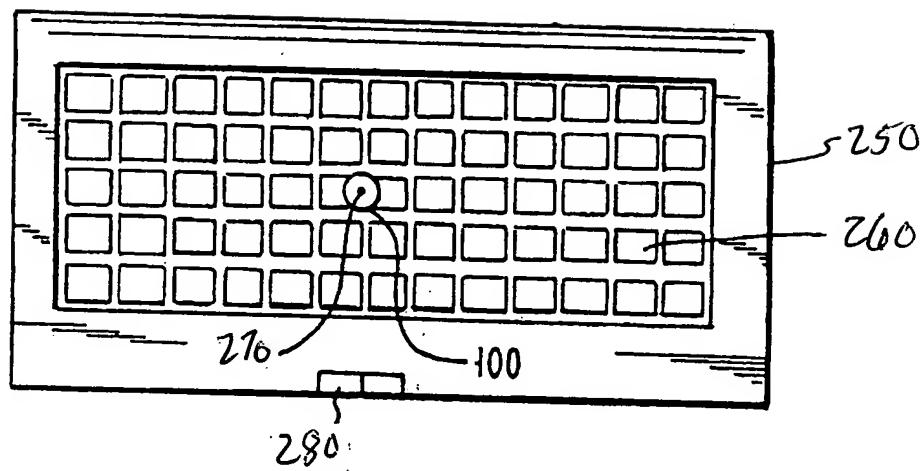


Figure 2.




(310)

identify at least one of a first period when a cursor is in motion and a second period when said cursor is not in motion

(320)

calibrate an input parameter signal using a first hands-off test during said first period and a second hands-off test different than said first hands-off test during said second period



300

Figure 3

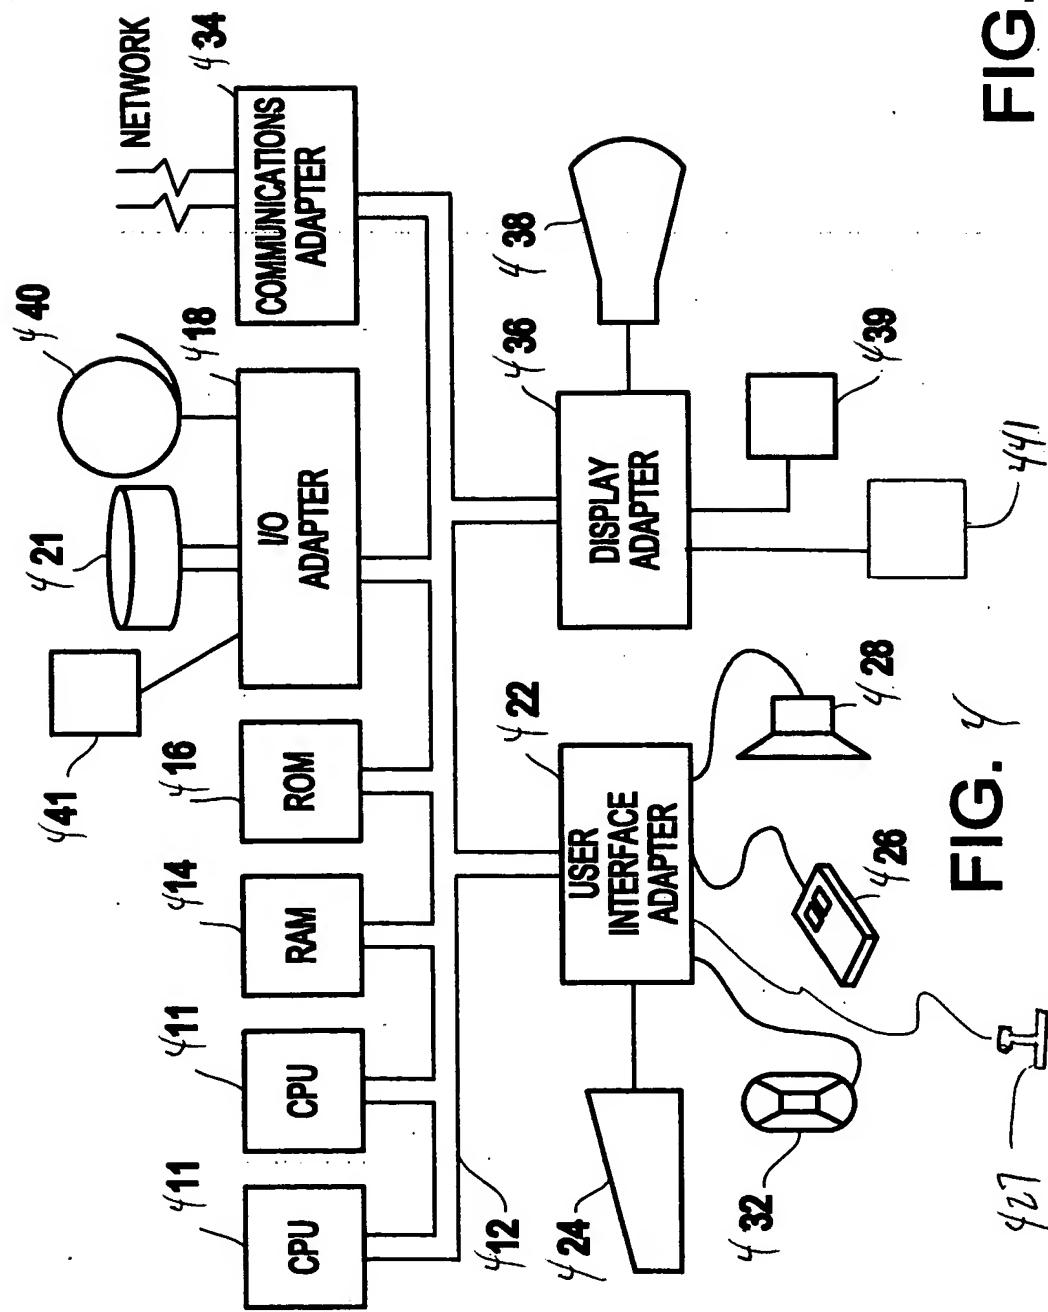


FIG. 4

FIG. 5

